



## NOVO COMBUSTION ANALYZER







4 YEARS WARRANTY ON INSTRUMENT AND GAS SENSORS



**Seitron Smart Analysis** 









**Seitron Smart Analysis Windows 10** 



## Novo

# PORTABLE COMBUSTION ANALYZER UP TO 4 SENSORS

7" Touch Display for easy menu navigation

**Optional Built-in Printer** 

**Long Life 02 Sensor (4 Years)** 

New Dual Range (Low/High) Sensor Technology

**Low NOx and SOx sensors** 

15 Preprogrammed Fuels Including Natural Gas, Oil, Propane, & Biofuels

**CO Protection Dilution Pump** 

**Rechargeable Li-Ion Batteries** 

Integrated water trap with LED backlight for easy maintenance

**Differential Pressure Manometer** 

Simultaneous Gas Pressure + Combustion Measurements

Draft Measurement Com. at

**Mobile App for iOS and Android** 

#### **EVERY KIT INCLUDES:**

- Combustion Analyzer
- Gas probe with 12" (300 mm) interchangeable tip
- 6 ft (1.8m) Single Connection Hose
- Integrated water trap
- Manometer Hoses
- Outdoor Combustion Air Temp Probe
- AC Power Adapter & Cable
- Hard plastic kit case
- Ouick Guide
- Calibration Certificate

#### **MAIN FEATURES**

- Precalibrated Gas Sensors
- Field Replaceable Sensors
- Automatic autozero (with gas sampling probe inserted in the chimney)
- Self-diagnosis with verification of the functions and status of the sensors
- · Language selectable by User
- Altitude Adjustment
- Integrated magnets
- 100 MB for complete analysis memory
- Dimensions:

Analyzer 10.6x3.6x2.7in (270x93x68mm), weight 2 lbs (0,9Kg) Kit 5x18x13in (125x465x335mm), weight 11 lbs (5Kg)

#### **MEASURED VALUES**

- Differential Flue Gas and Ambient Air Temperatures
- Incoming Air Temperature and Ambient Air Temperature
- · Draft and Differential Pressure
- Ambient CO

fa.com.al

O2 and CO in flue gas

#### **CALCULATED VALUES**

- · Combustion Efficiency, including condensing units
- · Stack losses and excess air
- · Flow velocity with optional Pitot tube
- CO Air Free

Product Configurations	Novo 1	Novo 3	Novo 4S	Novo 4N
Expandible up to 4 sensors (*)	-	1		✓
02 Sensor				/
CO/H2 Sensor		siafa.	com.a	1
NO Sensor	MMN	/	✓	✓
NOx Calculated	-	✓	✓	✓
NO2 Sensor	-	-	-	✓
NOx Total NOx (NO+NO2)	-	-	-	✓
SO2 Sensor	-	-	✓	-
Kit with integrated Printer	Novo 1-P	Novo 3-P	Novo 4S-P	Novo 4N-P

(\*Other gas sensors available upon request including CxHy (HC), H2S, H2, Ammonia, Direct CO2, and Methane (CH4).



### **NEW UPDATED FEATURES**



## 7" touch screen (85x155mm)

The new device has been redesigned to give the user an improved and easy-to-use experience.

The analyzer includes a large 7" touchscreen, granting maximum visibility of all information along with quick and smooth browsing experience.

## **Integrated water trap**

The water trap design has been completely innovated to guarantee maximum performance and easy maintenance. A large inspection window with backlit LED allows the user to quickly and very easily check the water level and filter at any time.





## **New Updated Analyzer Housing**

Reliabilty and ease of use have represented development guidelines for Novo, also inspiring the new cover.

With a rubber finish which confers a steady and simple grip, as well as a sturdy and modern design, the new housing offers a pleasant and functional use experience.



## **Simple ONE Probe Connection**

One source of major improvement of our analyzer is the new, innovative flue gas sampling probe connection. Instead of three (3) separate connections for temperature, draft and flue gases, it has been redesigned to just one (1) simple connection. The new connection allows the user to connect the probe without looking with an easy plug-n-play design.










When performing a combustion analysis of the various combustion parameters, the user may often need also a pressure manometer, in order to simultaneously check and/or adjust gas pressures of the equipment. Thanks to the possibility of measuring combustion parameters and gas pressures at the same time, the newly developed Novo drastically reduces service time and limits the need to use different devices.

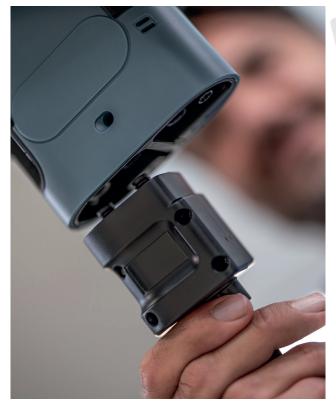



phone (215) 660-9777 - www.seitronamericas.com

#### Intuitive interface

In addition to the elegant and ergonomic design, the Novo features a simple, intuitive and efficient touchscreen interface.


The new and intuitive interface allows the user to quickly create customizable combustion reports, set and/ or change the parameters of the device, carry out multiple optional measurements, and so much more.

There is also the possibility to customize the home screen, with user's profile picture and information.

The combustion report can be shared in different formats or it can be printed by using the built-in integrated printer or the option wireless Bluetooth printer.

The new generation of LONG-LIFE gas sensors, installed in the Novo, enhance reliability and accuracy of measurements, in addition to a longer sensor life compared to competition.



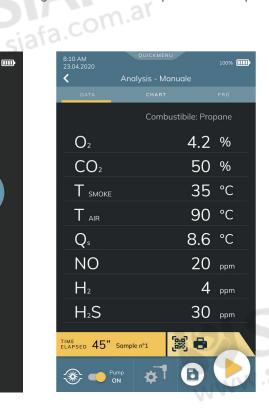







## **Seitron Smart Analysis**







#### **SEITRON SMART ANALYSIS APP**

- Data logging
- Report creation
- QR code or real-time App
- Sharing via e-mail (csv, pdf, xml)



Part#	РНОТО	DESCRIPTION	
AJPB01		Li-Ion Rechargeable Battery; 3.7Vdc - 6 A/h	
AJKA02	\$ SE	Power supply with US plug, USB type C and cable	
AJCR01	Oseitron	Hard plastic Case	
AJTA01		Water trap with flue gas filter	
AACFA01		Replacement dust filters for AACTA03 water trap (pack of 5 pieces)	
AARC10		Long Life thermal paper roll 2.2x1.4in (57x35mm)	
AAST04	rechargeable battery	Thermal printer with Bluetooth connection	
AJST01		Built-in Printer (Installation on request by Seitron Americas)	

Part#	РНОТО	DESCRIPTION
AJTB01	0	Gas pressure tube; length 40" (1 m)
AJSJ01	G at a	Sampling probe handle with 6ft (1.8 m) cable
AJPT01		Interchangeable 7" (180 mm) tip for AJSJ01 handle, maximum temperature 752°F (400°C)
AJPT02	<b>D</b>	Interchangeable 12" (300 mm) tip for AJSJ01 handle, maximum temperature 1112°F (600°C)
AJPT03	<b>&gt;</b>	Interchangeable 30" (750 mm) tip for AJSJ01 handle, maximum temperature 1472°F (800°C)
AJPT04	<b>5</b>	Interchangeable 40" (1000 mm) tip for AJSJ01 handle, maximum temperature 2192°F (1200°C)
AJEX01		10ft (3 m) extension cable for sampling probes with handle AJSJ01



## Novo - Gas Sensors

GAS	COD.	RANGE	SENSOR TYPE	RESOLUTION	ACCURACY	
02 Long Life	Novo O2 LL	025% v/v	Electrochemical Sensor	0.1% vol	±0.2% vol	
CO / H2	Novo CO/H2	0500.0 ppm	Electrochemical Sensor	0.1 ppm	±2 ppm 0 40 ppm ±5% v.m. 40.1 500.0 ppm	
		5018000 ppm	Electrochemical Sensor	1 ppm	±10% v.m. 501 8000 ppm	
CO Mid	Novo CO Mid	020000 ppm	Electrochemical Sensor	1 ppm	±10 ppm	
CO High	Novo CO High	0100000 ppm	Electrochemical Sensor	1 ppm	±100 ppm 0 1000 ppm ±10% v.m. 1001 100000 ppm	
NO	Novo NO	0500.0 ppm	Electrochemical Sensor	0.1 ppm	±2 ppm	
		5015000 ppm	Electrochemical Sensor	1 ppm	±10% v.m. 501 5000 ppm	
NO2	Novo NO2	0100.0 ppm	Electrochemical Sensor	0.1 ppm	±2 ppm   0 40 ppm ±5% v.m.   40.1 100.1 ppm	
N02		1011000 ppm	Electrochemical Sensor	1 ppm	±10% v.m. 101 1000 ppm	
S02	Novo SO2	0500.0 ppm	Electrochemical Sensor	0.1 ppm	±2 ppm   0 40 ppm ±5% v.m.   40.1 500.1 ppm	
		5015000 ppm	Electrochemical Sensor	1 ppm	±10% v.m. 501 5000 ppm	
H2	Novo H2	02000 ppm	Electrochemical Sensor	1 ppm	± 10 ppm	
H2 High	Novo H2	040000 ppm	Electrochemical Sensor	10 ppm	± 100 ppm	
H2S	Novo H2S	05000 ppm	Electrochemical Sensor	1 ppm	± 10 ppm 0 ppm - 100 ppm ± 10% v.m. 101 ppm - 5000 ppm	
H2S Low	Novo H2S low	0500.0 ppm	Electrochemical Sensor	0.1 ppm	±5 ppm 0 100.0 ppm ±5% v.m. 101 500.0 ppm	
NH3 Low	Novo NH3	0500.0 ppm	Electrochemical Sensor	0.1 ppm	±10 ppm 0 100.0 ppm ±10% v.m. 100.1 500.0 ppm	
СхНу	Novo CxHy	05% vol CH4	Pellistore Sensor	0.01% vol	±0.25% abs	
CH4 NIDR	Novo CH4 NDIR	0100% vol	NDIR Sensor	0.01% vol	±0.3 vol 0 10% vol ±10% v.m. 10.01% 100.00% vol	
CO2 NDIR	Novo CO2 NDIR	050% vol	NDIR Sensor	0.01% vol	±1 vol 0 10.00% vol ±2% fs 10.01% 50.00% vol	



#### **SEITRON AMERICAS INC.**

4622 E. Street Road Trevose, PA 19053 - USA Phone (215) 660-9777 Fax (215) 660-9770 info@seitronamericas.com www.seitronamericas.com



